
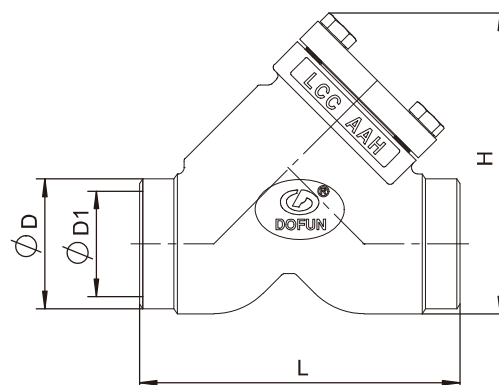


## 1、技术参数 Technical Parameter

- 公称通径：DN15-DN150  
Nominal Diameter: DN15-DN150
- 公称压力：4.0MPa  
Nominal Pressure: 4.0MPa
- 适用介质：R12,R22,R502,R134a,R404a,R507,R717等制冷剂。  
Applicable Medium: R12, R22, R502, R134a, R404a, R507, R717 and other refrigerants.
- 适用温度：-50℃ ~ +150℃  
Applicable Temperature: -50 °C ~ + 150 °C
- 结构形式：角式结构代号A 直通结构代号S  
Structure Form:  
Angle Type Structure code is A  
Straight Type Structure code is S

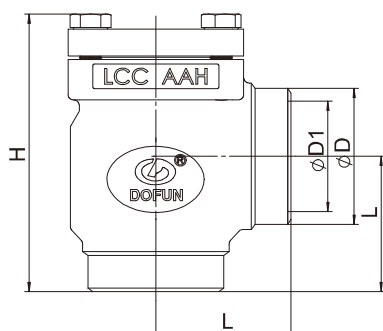

| 角式止回阀 Angle Type Check Valve |                                   |                       |        |     |     |       |
|------------------------------|-----------------------------------|-----------------------|--------|-----|-----|-------|
| 型号<br>Model                  | 通径<br>Nominal<br>Diameter<br>(DN) | 尺寸 ( mm ) Size ( mm ) |        |     |     |       |
|                              |                                   | ΦD-GB                 | ΦD-DIN | ΦD1 | L   | H     |
| CVD-A                        | 15                                | 22                    | 21.3   | 15  | 45  | 108   |
|                              | 20                                | 27                    | 27     | 20  | 45  | 108   |
|                              | 25                                | 32                    | 33.7   | 25  | 45  | 108   |
|                              | 32                                | 38                    | 42.4   | 32  | 56  | 136   |
|                              | 40                                | 45                    | 48.3   | 38  | 56  | 136   |
|                              | 50                                | 57                    | 60.3   | 49  | 60  | 124   |
|                              | 65                                | 76                    | 76     | 62  | 90  | 147   |
|                              | 80                                | 89                    | 89     | 76  | 106 | 185.5 |
|                              | 100                               | 108                   | 114    | 96  | 121 | 248   |
|                              | 125                               | 133                   | 139.7  | 120 | 133 | 270   |
|                              | 150                               | 159                   | 168    | 150 | 146 | 300   |

| 直通止回阀 Straight Type Check Valve |                                   |                       |        |     |     |     |
|---------------------------------|-----------------------------------|-----------------------|--------|-----|-----|-----|
| 型号<br>Model                     | 通径<br>Nominal<br>Diameter<br>(DN) | 尺寸 ( mm ) Size ( mm ) |        |     |     |     |
|                                 |                                   | ΦD-GB                 | ΦD-DIN | ΦD1 | L   | H   |
| CVD-S                           | 15                                | 22                    | 21.3   | 15  | 120 | 103 |
|                                 | 20                                | 27                    | 27     | 20  | 120 | 103 |
|                                 | 25                                | 32                    | 33.7   | 25  | 120 | 103 |
|                                 | 32                                | 38                    | 42.4   | 32  | 156 | 131 |
|                                 | 40                                | 45                    | 48.3   | 38  | 156 | 131 |
|                                 | 50                                | 57                    | 60.3   | 49  | 149 | 140 |
|                                 | 65                                | 76                    | 76     | 62  | 176 | 164 |
|                                 | 80                                | 89                    | 89     | 76  | 254 | 215 |
|                                 | 100                               | 108                   | 114    | 96  | 264 | 261 |
|                                 | 125                               | 133                   | 139.7  | 120 | 320 | 316 |
|                                 | 150                               | 159                   | 168    | 150 | 370 | 348 |